




W = Width, D = Depth, H = Height



230V~ 50Hz

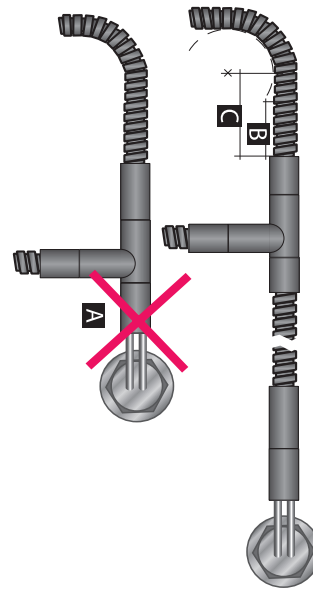

## T-connector

To connect the interior heater and engine heater together.  
Contains contact rails only to secure the electrical connections.

The engine heater must be connected to a extension cable only.  
NOT directly to the T-connector (A)

The T-connector must not be installed /placed under the engine  
to avoid mechanical stress or directly splashing from the road.

Fasten the T-connector using cable ties max 5,0cm on the cable  
from the PlugIn contact (B). Do not bend the cable closer than  
5,0cm from the PlugIn contact (C).

DEFA AS is conforming to the requirements of both ISO 9001-  
2008, ISO 14001:2004 and OHSAS 18001:2007. In addition  
to this, our engine heaters and cables are conforming to the  
requirements of ISO/TS 16949:2002.

### Item no

460831 (Weight: 22gr.)

Assembly box: 100 ex.

### Part of

DEFA T-connector is delivered only as a single unit.

### Use & Installation

Confer the enclosed product installation guide.

### Technical specifications

Voltage [V]	250
Current [A]	16
W/D/H [mm]	63/42/21
IP rating [IP]	44
Testing & acceptance	EN 50066-1 EN 60309-1